


11-22-00

A

11/20/00



3662 U.S. P.T.O.  
 66y's Docket No. P5482a

PATENT



# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATION UNDER 37 C.F.R. 1.10

"Express Mail" Mailing Label Number: EL700475442US  
 Date of Deposit: November 20, 2000

I hereby certify that this patent application is being deposited with the United States Postal Service on this date in an envelope as "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

*Virginia Silva*  
Virginia Silva

## APPLICATION TRANSMITTAL

### Box Patent Application

Assistant Commissioner for Patents  
 Washington, DC 20231

Inventor(s): Shinji Nakamiya  
 Katsuyoshi Takahashi

For: ELECTRONIC TIMEPIECE WITH CHECKING FUNCTION AND ITS CHECKING METHOD

☐ Prior Application No. , filed . The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

Enclosed are the following items:

- A. ☒ Postcard
- B. ☒ Patent Application Data Entry Format
- C. ☐ Other (specify)  
☐ Form PTO 1595

☐ Certified copies of the priority documents have been filed in the parent of this continuing application. The parent application, filed , was assigned Serial No. .

☐ Amend the specification by inserting before the first line, the sentence: -- This is a **Continuation** of pending prior application Serial No. filed on which is a continuation of Serial No. filed on which is now abandoned the contents of which are incorporated herein by reference.--

☒ The benefit of priority under 35 USC 119 is hereby claimed from the following foreign application(s):  
 Japanese Application Serial No. 11-333525, filed November 24, 1999  
 Japanese Application Serial No. , filed  
 Japanese Application Serial No. , filed  
 Japanese Application Serial No. , filed

☐ Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee. (At least one original independent claim is retained for filing.)

☐ Applicant(s) presently intend(s) to file additional papers in this case after receiving an official Filing Receipt. Should the Examiner take this case up for action before receiving such papers, it is respectfully requested that the Examiner contact the attorneys for the applicant(s) at the telephone number shown below.

☐ A petition, fee and response has been filed, or a conditional petition is now being filed, in the prior application to extend the term of the pending prior application. Enclosed is a petition for extension of time in the prior application.

## CLAIMS AS FILED (OTHER THAN SMALL ENTITY)

CLAIMS	(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Calculations
Total Claims (37 CFR 1.18(c))	24	- 20 =	4	x \$18 =	\$72.00
Independent Claims (37 CFR 1.18(b))	13	- 3 =	10	x \$80 =	\$800.00
Multiple Dependent Claims (if applicable) (37 CFR 1.16(d))				+ \$270 =	\$0
				Provisional Application Filing Fee =	\$ 0
				150 (37 CFR 1.16(k))	
				Basic Fee = (37 CFR 1.16(a))	\$710.00
				TOTAL =	\$1,582.00

- ☒ Applicant(s) believe(s) that no extension of time is required. However, this conditional petition is being made to provide for the possibility that applicant has inadvertently overlooked the need for a petition for extension of time.

The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-2746 as described below:

- ☒ Charge the total filing fee of \$1,582.00.
- ☒ Charge any additional filing fees as required under 37 C.F.R. 1.16 and 1.17.
- ☒ Credit any overpayment.

Please address all correspondence in connection with this application to:

**Intellectual Property Department**  
**Epson Research and Development, Inc.**  
**150 River Oaks Parkway, Suite 225**  
**San Jose, CA 95134**  
**Customer No. 20178**

PATENT & TRADEMARK OFFICE



20178

*Rosalio Haro*

**Rosalio Haro**

Registration No.: 42,633

Telephone: (408) 952-6000

FAX: (408) 954-9058

Date: November 20, 2000

COPY

INVENTOR INFORMATION

Inventor One Given Name:: Shinji  
Family Name:: Nakamiya  
Postal Address Line One:: 3-5, Owa 3-chome  
City:: Suwa-shi  
State or Province:: Nagano-ken  
Country:: Japan  
Postal or Zip Code:: 392-8502  
Citizenship Country:: Japan

Inventor Two Given Name:: Katsuyoshi  
Family Name:: Takahashi  
Postal Address Line One:: 3-5, Owa 3-chome  
City:: Suwa-shi  
State or Province:: Nagano-ken  
Country:: Japan  
Postal or Zip Code:: 392-8502  
Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 20178  
Telephone:: (408) 952-6000  
Fax:: (408) 954-9058  
E-Mail:: ipd@erd.epson.com

APPLICATION INFORMATION

Title Line One:: Electronic Timepiece With  
Title Line Two:: Checking Function And Its  
Title Line Three:: Checking Method  
Total Drawing Sheets:: 15  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: P5482a  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 20178

PRIOR FOREIGN APPLICATION

Foreign Application One:: 11-333525

Filing Date:: November 24, 1999

Country:: Japan

Priority Claimed:: Yes

#### INVENTOR INFORMATION

Inventor One Given Name:: Shinji  
Family Name:: Nakamiya  
Postal Address Line One:: 3-5, Owa 3-chome  
City:: Suwa-shi  
State or Province:: Nagano-ken  
Country:: Japan  
Postal or Zip Code:: 392-8502  
Citizenship Country:: Japan

Inventor Two Given Name:: Katsuyoshi  
Family Name:: Takahashi  
Postal Address Line One:: 3-5, Owa 3-chome  
City:: Suwa-shi  
State or Province:: Nagano-ken  
Country:: Japan  
Postal or Zip Code:: 392-8502  
Citizenship Country:: Japan

#### CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 20178  
Telephone:: (408) 952-6000  
Fax:: (408) 954-9058  
E-Mail:: ipd@erd.epson.com

#### APPLICATION INFORMATION

Title Line One:: Electronic Timepiece With  
Title Line Two:: Checking Function And Its  
Title Line Three:: Checking Method  
Total Drawing Sheets:: 15  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: P5482a  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 20178

PRIOR FOREIGN APPLICATION

Foreign Application One:: 11-333525

Filing Date:: November 24, 1999

Country:: Japan

Priority Claimed:: Yes

P5482a

APPLICATION

FOR

UNITED STATES LETTERS PATENT

Be it known that we, Shinji Nakamiya and Katsuyoshi Takahashi, both citizens of Japan, of 3-5 Owa 3-chome, Suwa-shi, Nagano-ken, 392 Japan, c/o Seiko Epson Corporation, have invented new and useful improvements in:

**Electronic Timepiece With Checking Function And Its Checking Method**

of which the following is the specification.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2

## Electronic Timepiece With Checking Function And Its Checking Method

Inventors: Shinji Nakamiya  
Katsuyoshi Takahashi

### BACKGROUND OF THE INVENTION

#### Field of the Invention

This invention relates to electronic timepiece operating by the power supply of chargeable battery, and to checking method for the timepiece.

#### Description of the Related Art

There are a variety of portable electronic timepieces such as wristwatches and electrical clocks. Some of these timepieces have chargeable power source such as chargeable batteries or large-capacitance capacitors. And in some others, battery units are constructed as removable unit. In these timepieces, time-keeping units and digital (or analog) displaying units for displaying time conduct operation by using the electrical power stored on the batteries.

FIG. 11 shows a flowchart showing one example of manufacturing process and checking process for timepiece with battery and charging means for the battery.

As for FIG. 11, discharging step (step A101) is done before manufacturing electrical timepiece.

In this discharging step, by using an external discharging circuit, for example as shown in FIG. 12, the battery is discharged alone. In the external discharging circuit 100 shown in FIG. 12, a plurality of (n piece of) batteries from BA1 to BAn are placed on a battery placing section 101. Each battery from BA1 to BAn is connected in series to a resister from R1 to Rn respectively. A sink type constant voltage power source 102 is connected in parallel to each of the above series-connected resisters and batteries. By the above configured external discharging circuit 100, batteries from BA1 to BAn are discharged at the same time. In this case, the number of installation terminals for the batteries in the external discharging circuit 100 have to be enough for the number of batteries discharged at the same time.

After this battery discharging step (step A101), an assembling step (step A102) and an exterior installation step (step A103) is conducted. Then a battery charging step (step A104) is conducted.



In this charging step, quality of charging function of the battery is examined, and enough electrical energy for the electrical timepiece operation in the next step of an operation checking step (step A105) is stored in the battery. Charging is conducted in the following way. For example, for a timepiece with a rotating type generator, giving a vibration to the timepiece moves an oscillation weight in the rotating type generator of the timepiece. A kinetic energy generated in the oscillation weight in this process is converted by the generator into electrical energy, and then the electrical energy is stored in the battery. And in other type of timepiece such as with solar panel, generation is conducted by the solar panel, and the generated electrical energy is stored in the battery. And yet in other type of timepiece, it is possible to use for generation an inductive energy in accordance with an exterior radio wave or a magnetic force, and to charge the battery.

Confirmation of a charging state is conducted in the following way. In the charging step, an operator puts a charging state display function into action, the charging state display function being installed in the timepiece. And the operator checks the displaying state of the timepiece, and confirms whether or not the charging the battery is over.

The battery discharging step (step A101) mentioned above is done in order to, at this charging step, control an accuracy of battery voltage inspection within a certain range.

In the operation checking step (step A105), a quality verification for the electrical timepiece is conducted. This quality verification comprises timepiece operation verification in high and cold temperature. In detail, in the operation checking step, at around 60 degree centigrade of high temperature atmosphere and around minus 10 degree centigrade of low temperature atmosphere, a trial operation extending several hours or several tens of hours is conducted. In this trial operation period, a stoppage and a delay of time display is checked. And by confirming a continuous discharging time of the battery after the trial operation, a quality confirmation (judgment) is conducted.

After the operation checking step, a shipment checking step (step A106) with an exterior checking and a full-charging step (step A107) to full-charge the battery is conducted, then the timepiece is shipped (step A108).

Incidentally, in the battery discharging step explained above, discharging the battery is conducted alone by using the external discharging circuit before the assembling. And discharging time requires from several to several tens of hours. Therefore, discharging circuit facility with enough number of, for example enough

for one day production of timepiece, installation terminals for the batteries is necessary. Hence, this discharging method is not appropriate for a model produced on a massive scale.

And if, for example, after the shipment, an operation verification for discharging function is required, it is very difficult for the battery to be made on a certain discharging state without a discharging facility.

Moreover, there are several kind of battery. Even among lithium type battery, discharging character differs, for example, according to types of electrode as shown in FIG. 13. And chargeable battery has a characteristic of voltage recovery effect by which, after stopping discharging, voltage rises. Therefore battery voltage is unstable and becomes wide after discharging. This voltage dispersion after discharging causes a disadvantageous effect on the checking accuracy.

And in the charging step, for example, a charging state such as charging voltage is displayed by the amount of fast-forwarding movement of the analog second hand on the displaying section, by pushing a certain switch. In this case, external operation such as pushing a certain switch or the like is necessary to confirm the charging state. Hence an external input is required, and resulting in a problem of more operation process. And since confirmation is done by the amount of fast-forwarding movement of the analog second hand, if the amount of fast-forwarding movement is wrongly recognized, there is a possibility that checking result falls in a fault judgment.

And in the operation checking step, the quality verification for the electrical timepiece is conducted by checking the operation under a high and low temperature atmosphere. More precisely, by checking whether or not there is a stoppage (continuous time-keeping trouble) or a delay under the above condition, the quality verification of the timepiece is conducted. Therefore even when the trouble is detected in the timepiece, it is difficult to identify the cause of the trouble whether it is due to the motor drive unit or due to the battery.

In order to confirm that it is due to a motor drive trouble, it is required to examine even a gear train unit for driving hour, minute and second hand. And in order to do this examination, it is required to break the timepiece up by considerably fine detail. Hence, in order to prevent this complicated breaking up work and examination, there is a demand that distinction between the motor drive trouble and other factor be made as easy as possible. However, in the prior arts timepiece, it is difficult to make a distinction between the motor drive trouble and other factor.

And as for the motor drive trouble, as long as the motor is not apparently low quality, it is not possible to judge that the trouble is due to the motor. But, for example, there is somewhat low quality motor which under some temperature condition works and does not cause a delay. Ideally, this kind of motors should also be judged as motor problem. However it is difficult to make such a judgement.

By taking the above situation into considering, the object of the present invention is to provide an electrical timepiece with a checking function which, for example, in the timepiece manufacturing process enhances the checking accuracy and efficiency, and a checking method for the timepiece.

### Objects of the Invention

Therefore, it is an object of the present invention to overcome the aforementioned problems.

### Summary of the Invention

In order to solve the above problems, in the present invention, a timepiece comprises an external input unit for receiving an external signal, a display section for displaying the time, a battery unit capable of charging, a drive unit for driving the display section by the electrical power stored in the battery unit, a comparator unit, and a discharging control unit. The comparator unit detects a voltage of the battery unit, and compares the voltage with a reference voltage. The discharging control unit, when, via the external input terminal, a prescribed signal enters, starts discharging from the battery unit, and when the detected result by the comparator unit satisfies a prescribed condition, stops the discharging from the battery unit.

By the present invention, it is possible to provide following advantages. Being able to check the timepiece operation more accurately and efficiently. Unnecessity of an external circuit for discharging the battery in the manufacturing process. Being able to lower the voltage dispersion of the battery after and before charging.

### Brief Description of the Drawings

FIG. 1 is a block diagram showing a construction of the timepiece of one embodiment of the present invention.

FIG. 2 is a flowchart showing a flow of manufacturing and checking process of the timepiece.

FIG. 3 is a block diagram showing constructions of each part of the timepiece.

FIG. 4 is a circuit diagram showing the construction of the operation check function control circuit 310 shown in FIG. 3.

FIG. 5 is a circuit diagram showing a second external input unit measure circuit 311, operation check function mode select circuit 312, a stored electricity unit discharge control circuit 305, a stored electricity unit charging completion detect circuit 306, and a motor drive trouble detect circuit 304 shown in FIG. 3.

FIG. 6A and 6B are timing charts showing operation of the operation check function control circuit 310 shown in FIG. 3.

FIG. 7 is a timing chart showing one example of operations of each unit shown in FIG. 3.

FIG. 8 is a block chart explaining a discharging current in a motor drive unit E shown in FIG. 3.

FIG. 9A, 9B and 9C cooperate to form a flowchart showing flow of operation and checking process of the timepiece of the present invention.

FIG. 10 is a diagram showing a specification of the operation and checking process.

FIG. 11 is a flowchart showing an operation and checking process of the timepiece of prior arts.

FIG. 12 is a circuit showing an external discharging circuit of prior arts for batteries.

FIG. 13 is a diagram showing discharging characteristics of two types of lithium chargeable battery (MT: which uses manganese and titanium for electrode, CT: which uses titanium and carbon for electrode).

### Description of the Preferred Embodiments

From here, by using drawings, one embodiment of present invention will be described. FIG. 1 is a block diagram which shows a construction of the timepiece 1 of one embodiment of the present invention. In FIG. 1, the timepiece 1 is a wristwatch. User of this wristwatch wears it by using a belt attached to the apparatus. The electrical timepiece 1 comprises a generator system A, a power supply system B, a control unit C, a motor unit D, a motor drive circuit E, a first external input terminal F, and a second external input terminal G. Brief explanations of these parts are as follows. The generator system A generates alternating current. The power supply system B rectifies the alternating current, then stores the generated energy into the battery unit 48, and then raises or lowers

the stored voltage, and then supplies the electricity to each constructing parts. The control unit C controls the entire timepiece 1. The motor unit D comprises a second hand 61, a minute hand 62, a hour hand 63, and a stepping motor 10 for the hands. The motor drive circuit E is a circuit for driving the stepping motor 10 in the motor unit D, based on a control signal from the control unit C. The first external input unit F and the second external input unit G are means for changing a checking mode process in turn. This operation check function is one feature of the timepiece 1 of the present invention.

The generator system A comprises a generating apparatus 40, an oscillating weight 45, an acceleration gear 46. The generating apparatus 40 in FIG. 1 is an electromagnetic induction type AC generator apparatus. The electromagnetic induction type AC generator apparatus comprises a generator rotor 43, a generator stator 42, and a generator coil 44. The oscillating weight 45 is a means for providing the generator rotor 43 with an energy. In this wristwatch type electrical timepiece 1, the oscillating weight 45 is driven to rotate by movement of user's arm. The movement of the oscillating weight 45, via the acceleration gear 46, is transmitted to a generator rotor 43. Then the generator rotor 43 rotates in a generator stator 42. Then voltage is induced in the generator coil 44. The voltage is output to between two output terminals of the generator coil 44. In this way, in the generator system A, generation is done by use of energy related to user's everyday life.

The power supply system B comprises a rectifier circuit 47, a battery (a battery unit) 48 and a voltage raising and lowering circuit 49. The alternating voltage from the generator system A is rectified by the rectifier circuit 47 into a direct voltage, and is stored in the battery (the battery unit) 48. The battery unit 48 comprises a large-capacitance capacitor or a chargeable battery such as lithium battery. The direct voltage stored in the battery 48 is supplied to the voltage raising and lowering circuit 49. The voltage raising and lowering circuit 49 is a circuit for, by using more than one capacitors of from 49a to 49c, raising or lowering the direct voltage multiple times. The output voltage of the voltage raising and lowering circuit 49 is controllable by a control signal  $\phi 11$  from the control unit C.

In the structure shown in FIG. 1, a voltage VDD of higher electric potential side of the battery 48 (higher electric potential side voltage) is described as a reference electric potential GND. And a lower electric potential side voltage of the battery 48 is described as a VTKN (a first lower electric potential side voltage). And a lower electric potential side voltage of the raising and lowering circuit 49 is described as a second lower electric potential side voltage VSS. Output voltage of

the generator coil 44 is input to the control unit C as a control signal  $\phi 13$ . A voltage value of voltage VSS is input to the control unit C as a control signal  $\phi 12$ .

A motor drive circuit E creates a drive pulse based on a drive clock supplied from the control unit C, and then provides the drive pulse to a stepping motor 10 in the motor unit D. The stepping motor 10 comprises a rotator section. The rotator section rotates a fixed degree when the drive pulse is supplied to the stepping motor 10. The rotation of the rotating part of the stepping motor 10 is transmitted to the second hand 61 by way of a second intermediate wheel 51 and a second wheel 52, both wheel being connected to the rotating part. Then the second hand rotates, and the second indication is conducted. And the rotation of the second wheel 52 is transmitted to a minute intermediate wheel 53, a minute wheel 54, an hour intermediate wheel 55, and an hour wheel 56. The minute wheel 54 is connected to a minute hand 62. The hour wheel 56 is connected to a hour hand 63. Therefore these hands works together with the rotation of the stepping motor 10. And hour and minute indications are conducted.

Although not described in the drawings, it is possible to connect other transmission system to the gear train 50 which is constructed by wheels from 51 to 56 in order to display a calendar and so on. For example, in order to display a date, it is possible to put a cylindrical intermediate wheel, an intermediate date wheel, and a date wheel and so on. And still, it is possible to put a calendar correction gear train (such as a first calendar correction wheel, a second calendar correction wheel, a calendar correction wheel, and a date disc).

The first external input unit F comprises a crown for time setting and a circuit for detecting the time-setting operation electrically. In this embodiment, the second external input unit G is used as a switch for starting the operation check function the timepiece 1 has. The second external input terminal G is an indicator switch installed on the exterior section of the wristwatch. The second external input terminal G is used when confirming the charging state of the battery 48. And also in this embodiment, the second external input terminal G is used as a switch for inputting a signal to change modes of from 1 to 3 while operating the operation check process (B100). Operation state of the first external input unit F and the second external input unit G is input to the control unit C in electrical signal.

Here, by referring to FIG. 2, an outline of the operation check process realized in this embodiment will be described. FIG. 2 is a flowchart showing an example of manufacturing and checking process of the electrical timepiece of the present embodiment. The operation check process B100 is conducted after the manufacturing process (step A102) and the exterior installation process (step A103).

The operation check process B100 is composed of three processes (step B101, step B104, and step B105). These three processes is conducted by using each function of modes from 1 to 3 which the timepiece has in itself.

The first process (step B101) of the operation check process B100 is corresponding to discharging step A101 in FIG. 11. The first process is conducted as a preparation process for checking the charging function of the timepiece 1. In the first process, by mode 2 function of the timepiece 1, an electrical power consumption circuit is put to start, and the electrical power consumption circuit discharges electrical charge stored in the battery 48, and thereby the voltage of the battery is controlled into a prescribed voltage.

The second process (step B104) of the operation check process B100 is a process for judging a quality of charging performance. The second process is conducted by mode 2 function of the timepiece 1 (charging performance quality judge function). In more details, in this second process, the electrical timepiece 1 is supplied with a vibration, and thereby the oscillating weight in it is driven to rotate. Therefore electricity is generated in the generator system A, and charging the battery 48 is done. Then, by the mode 2 function (charging performance quality judge function), whether or not the battery voltage reaches charging completion voltage within a prescribed charging period is judged, and result of judgement is displayed to the user by movement of second hand 61.

The third process (step B105) of the operation check process B100 is a process for poor quality detection by operating the timepiece 1. In more details, in this third process, under high or low temperature condition, although being able to rotate the stepping motor 10, irregular motor drive pulse which will result in more electrical power consumption is generated from the motor drive circuit E. Operation under this kind of severe condition enables to detect motor characteristic trouble which is not possible to detect under normal motor drive pulse. When the trouble is detected, movement of, for example, the second hand 61 is changed from a normal state to other state, and the state is continued. The user sees that the movement of second hand is different from normal state, and knows the motor characteristics has some trouble.

Next, by using FIG. 3 to 8, details of each construction of the timepiece 1 shown FIG. 1 will be described. FIG. 3 is a block diagram showing detail of the construction of the control unit C, and signal flows between units of from A to G. In FIG. 3, blocks of from 301 to 312 are circuit blocks in the control unit C, and those surrounded by broken lines are not.

The charge detecting circuit 301 receives the output voltage of the generator coil 44 as a generation voltage signal SW ( $\phi 13$ ), and, by the signal, detects a generation state of the generator system A. And then the circuit 301 outputs the result showing a detection result of the charging state as a charge detect result signal SA. The signal SA which enters into the rectifier circuit 47 in the power supply system B is used as a signal for controlling a rectification operation. Rectified output of the rectifier circuit 47 is supplied to the battery (the battery unit) 48 as a rectification output signal SB. And a stored voltage signal SC showing the stored voltage (=VKTN) of battery 48 enters into a raising and lowering circuit 49 and a voltage detecting circuit 302.

The voltage detecting circuit 302 receives the stored voltage signal SC, a stored voltage raising and lowering result signal SD ( $\phi 12$ =VSS), and a voltage detect control signal SX. The stored voltage raising and lowering result signal SD is a signal indicating the output voltage of the raising and lowering circuit 49. The voltage detect control signal SX is output from a timepiece control circuit 303. The voltage detecting circuit 302, when the voltage detect control signal SX is active, compares the signal SC of indicating the stored voltage VKTN with predetermined comparison voltages of DCHRGV and CHRGV respectively, then outputs a voltage detect result signal SN comprised of bits SN1 and SN2 indicating respective comparison results.

Incidentally, other than direct comparison between the stored voltage VKTN and the comparison voltages, it is possible to compare, instead of the stored voltage VKTN, the raising and lowering voltage VSS with the voltages of DCHRGV and CHRGV, and then outputs the voltage detect result signal SN.

For example, when the raising and lowering circuit 49 is on a state of raising ratio of 2, if that the absolute value of VSS is 1.25 V is detected, outputting the voltage detect result signal SN indicating the absolute value of VKTN of 0.625 V gives an equivalent effect.

The timepiece control circuit 303 uses the output voltage VSS of the raising and lowering circuit 49 as a power source. The timepiece control circuit 303 receives a first and a second stored electricity unit discharge control signals SO1 and SO2 from a stored electricity unit discharge control circuit 305, a stored electricity unit charge completion control signal SP from a stored electricity unit charging completion judge circuit 306, a motor drive trouble judge signal SQ from a motor drive trouble judge circuit 304, a high-frequency magnetic field detect result signal SK from high-frequency magnetic field detect circuit 307, an alternating current magnetic field detect result signal SL from an alternating current magnetic



field detect circuit 308, and a rotation detect result signal SM from a rotation detect circuit 309.

Then the timepiece control circuit 303 generates the voltage detect control signal SX, and supplies it to the voltage detecting circuit 302.

And the timepiece control circuit 303 generates a motor driving signal SE, SF, SG, and SH, and supplies them to the motor drive circuit E, and also generates a non-rotation detect measure signal SY, and supplies it to the motor drive trouble judge circuit 304.

The motor drive signal SE is a pulse signal comprised of a normal driving pulse, a rotation detect pulse, a high frequency magnetic field detect pulse, a magnetic field detect pulse, and an auxiliary pulse and so on. The normal driving pulse is a pulse supplied to the motor drive circuit E for regular motor drive. The rotation detect pulse is a pulse supplied to the motor drive circuit E when detecting whether or not there is a high-frequency magnetic field. The high frequency magnetic field detect pulse is a pulse supplied to the motor drive circuit E for detecting an external magnetic field. The auxiliary pulse is a pulse output when the motor fails to rotate by only the normal driving pulse, and has bigger effective electric power than the normal driving pulse. When the auxiliary pulse is generated, the non-rotation detect measure signal SY is generated.

The motor driving signal SF is a pulse for controlling the motor driving circuit E when discharging the battery 48.

The motor driving signal SG is a pulse for controlling the motor unit D when charging the battery 48 is completed.

The motor driving signal SH is a pulse for controlling the motor unit D to other hand movement from normal hand movement, and, when motor trouble takes place, is output.

When a high-frequency magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The high frequency magnetic field detect circuit 307 is a circuit to detect existence of a high-frequency magnetic field by comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

When a magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The alternating current magnetic field detect circuit 308

is a circuit to detect existence of an alternating current magnetic field by comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

When a rotation detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The rotation detect circuit 309 is a circuit to detect existence of a rotation of the drive motor by comparing a voltage SJ of the induced voltage with the pre-determined reference value for rotation detection.

Incidentally, a section in the timepiece control circuit 303 for outputting the motor drive signal SE, the high frequency magnetic field detect circuit 307, the alternating current magnetic field detect circuit 308, and the rotation detect circuit 309 are based on known techniques which have been used for controlling stepping motor drive. For example, Japanese Patent Application Laid-Open Publication No.10-225191 entitled "control device for stepping motor, its control method, and time keeping device", and Japanese Patent Publication No. 3-45798 entitled "analog electric timepiece" explain the technique.

An operation check function control circuit 310 receives a first external input signal SR1 and a first external input differential signal SR2. The first external input signal SR1 is a signal output from a first external input unit F, and indicating that a switch (a crown) in the first external input unit F is operated. The first external input differential signal SR2 is a differentiated signal of the first external input signal SR1. And the operation check function control circuit 310 outputs an operation check function control signal SS.

A second external input unit measure circuit 311 receives an operation check function control signal SS and a second external input signal ST. The second external input signal ST is a signal output from a second external input unit G, and indicating that a switch (a crown) in the second external input unit G is operated. And the second external input unit measure circuit 311 outputs an operation check function mode select signal SU which has two bits of SU1 and SU2.

The operation check function mode select circuit 312 receives the operation check function mode select signal SU and the operation check function control signal SS. And the operation check function mode select circuit 312 outputs an operation check function mode select result signal SV which has three bits of SV1, SV2, and SV3. The three bits of SV1, SV2, and SV3 of the operation check function mode select result signal SV enters into the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the

motor drive trouble judge circuit 304 respectively. A bit SV1 of the operation check function mode select result signal SV is a bit indicating by positive logic that the operation check function is in the mode 1. The bit SV1 has the high level when the mode of the operation check function is in the mode 1. A bit SV2 is a bit indicating by positive logic that the operation check function is in the mode 2. The bit SV2 has the high level when the mode of the operation check function is in the mode 2. A bit SV3 is a bit indicating by negative logic that the operation check function is in the mode 3. The bit SV3 has the low level when the mode of the operation check function is in the mode 3.

Next, referring to FIGs. 4, 5, and 7, the description will be given with respect to the operation check function control circuit 310, the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

FIG. 4 is a circuit diagram showing the detailed construction of the operation check function control circuit 310 shown in FIG. 3. The operation check function control circuit 310 comprises two 2-bit counters 401 and 402, a 1-bit counter 403, two D flip-flops 404 and 405, an SR latch 406, three double-input ORs 407 to 409, a double-input AND 410, a double-input XNOR (exclusive logic addition of negative logic output) 411, and two double-input of positive logic input and negative logic input ANDs 412 and 413.

In the reset terminal R of the 2-bit counter 401 enters an output signal of the OR 408. In the clock terminal CLK of the 2-bit counter 401 enters a clock signal F1 having a cycle of one second. The 2-bit counter 401 counts the clock signal F1 when the output signal of the OR 408 has the low level.

In the positive logic input of the AND 412 enters the first external input signal SR1. The signal SR1 becomes the high level when the crown which is the switch of the first external input unit F is pulled out by two clicks.

In the positive logic input of the AND 413 enters the first external input differential signal SR2. The signal SR2 is a differentiated signal of the signal SR1. In more detail, the signal SR2 is generated under a case when the crown in a state of being pulled out by two clicks is pushed back by one click or two, the first external input signal SR1 turns to the low level from the high level. The signal SR2 is a single pulse signal having a predetermined pulse width.

In the negative logic input of the ANDs 412 and 413 enters the operation check function mode select result signal SV2 output from the operation check

function mode select circuit 312. When the signal SV2 has the low level, the ANDs 412 and 413 output the first external input signal SR1 and the first external input differential signal SR2 as they are.

In the clock terminal CLK of the 1-bit counter 403 enters the clock signal F1 having a cycle of one second. In the reset terminal R having the low active of the 1-bit counter 403 enters the output signal of the AND 412. The 1-bit counter 403 counts the clock signal F1 when the output signal of the AND 412 has the high level.

The data terminal D of the D flip-flap 404 is fixed at the high level. In the reset terminal R having the low active of D flip-flap 404 enters the output signal of the AND 412. In the clock terminal CLK of the D flip-flap 404 enters the output signal of the output terminal XQ of the 1-bit counter 403. Accordingly, under a state that the output signal of the AND 412 has the high level, when the output signal of the output terminal XQ of the 1-bit counter rises, the D flip-flap 404 reads the input signal having high level which is given to the data terminal D and outputs the same from the output terminal Q.

The data terminal D of the D flip-flap 405 is fixed at the high level. In the reset terminal R having the low active of D flip-flap 405 enters the output signal of the AND 410. In the clock terminal CLK of the D flip-flap 405 enters the output signal of the AND 412. Accordingly, under a state that the output signal of the AND 410 has the high level, when the output signal of the AND 412 rises, the D flip-flap 405 reads the input signal having high level which is given to the data terminal D and outputs the same from the output terminal Q.

The OR 407 receives the 2<sup>1</sup> output Q1 of the 2-bit counter 401 and the output signal from the output terminal Q of the D flip-flop 405.

In the set terminal S of the SR latch 406 enters the output signal of the OR 407. In the reset terminal R of the SR latch 406 enters the output signal from the output terminal Q of the D flip-flap 404.

The OR 409 outputs a logical sum of the output signal of the output terminal Q of the SR latch 406 and an output signal of the AND 413.

In the clock terminal CLK of the 2-bit counter 402 enters the output signal of the OR 409. In the reset terminal R of the 2-bit counter 402 enters the output signal of the output terminal Q of the SR latch 406. The counter 402, when the output signal of the SR latch 406 has the low level, counts the signal SR2 supplied via the AND 413 and OR 409. Here, when the output of the OR 407 which is to be a

set input S of the SR latch 406 has the low level, the output Q of the SR latch 406 becomes the low level by receiving the high level signal once in the reset input R.

The 2-bit counter 402 has a  $2^0$  output Q0 and a  $2^1$  output Q1. These output terminals are connected to input terminals of the AND 410. Accordingly, in a case in which the output Q of the SR latch 406 has the low level, when as SR2 three pulse signals enter into the 2-bit counter 402, both the outputs Q0 and Q1 become the high level and the output signal of the AND 410 becomes the high level.

The output signal of the AND 410 is output as operation check function control signal SS from the operation check function control circuit 310. The signal SS when the high level starts the operation check function. And the signal SS is input to the reset input terminal R having the low active of the D flip-flop 405 as mentioned above.

The XNOR 411, when both of the  $2^0$  output Q0 and the  $2^1$  output Q1 of the counter 402 have the low level or high level, outputs a signal of high level, and when the levels of them are different, outputs a signal having the low level.

The OR 408 outputs a logical sum of the output signal of the XNOR 411 and the output signal of the AND 413 to the reset terminal R of the 2-bit counter 401.

FIG. 6A, 6B, and 7 are timing charts showing a function of the operation check function control circuit 310 explained above.

First, the state when the operation check function mode is not at the mode 2, the operation check function mode select result signal SV2 has the low level, and the operation check function control signal SS has the low level will be described.

In this case, the operation check function control circuit 310 receives the signal SR1 having the high level for more than 1 or 2 second (period T1) of time, and from the time the signal SR1 turns to the low level, when the signal SR1 falls twice continuously from the high level to the low level at an interval T2 of less than 1.5 second average, raises the operation check function control signal SS to the high level.

This operation is described by reference to FIG. 6A and 6B.

At the initial state, the output signal Q of the SR latch 406 has the high level, both the output signals Q0 and Q1 of the counter 402 have the low level, the signal SS has the low level, the output signal of the double-input XNOR 411 has the high level, both the output signals Q0 and Q1 of the counter 401 have the low level, and the output signal Q of the D flip-flop 405 has the low level.

Here, when the crown is pulled out to the second click, the signal SR1 becomes the high level. As a result, the output signal of the AND gate 412 becomes the high level, and the reset of the counter 403 and the D flip-flop 404 are cancelled.

After this cancellation, when the first clock pulse F1 is generated, by this clock pulse F1 counting of the counter 403 is carried out, and the output signal XQ of the counter 403 falls (the arrow a1).

Then, when the second clock pulse F1 is generated, counting of the counter 403 is carried out further, and the output signal XQ of the counter 403 rises (the arrow a1). As a result, the high level signal is input to the D flip-flop 404, and the output signal Q of the D flip-flop 404 rises (the arrow a3). Then by this rise of the output signal Q of the D flip-flop 404, the SR latch 406 is reset, and the output signal Q of the SR latch 406 becomes the low level (the arrow a4). And because the SR latch 406 becomes the low level, the reset of the counter 402 is cancelled, and the state of the counter 402 becomes practicable to counting.

Next, when the crown is pushed back from the second click to the first click or the normal position, the signal SR1 falls to the low level. As a result, the counter 403 and the D flip-flop 404 are reset, and the output signal Q of the D flip-flop 404 becomes the low level.

On the other hand, when the pulse signal SR2 is generated by the fall of the signal SR1, the pulse signal SR2 starts the counter 402 to conduct the counting up, and the output signal Q0 of the counter 402 rises to the high level (the arrow a6). As a result, the output signal of the XNOR 411 becomes the low level (the arrow a7). Thus the reset of the counter 401 is cancelled, and the state of the counter 401 becomes practicable to counting.

As described above, after the crown is pulled out to the second click, when two clock pulses F1 are generated, the state of the counter 402 becomes practicable to counting. Then when the crown is pushed back to the first click or the normal position, the state of the counter 401 becomes practicable to counting.

In the above description, in the period from the rise to the fall of the signal SR1, two clock pulses F1 are generated. However, a case where three or more clock pulses F1 are generated falls into the same result.

Afterward, if the crown is not handled, the signal SR1 does not change, and the clock pulse F1 is generated, counting up is carried out at the counter 401, and the output signal Q0 of the counter 401 becomes the high level (the arrow a8). Then when the clock pulse F1 is generated further, counting up is carried out at the

counter 401, and the output signal Q0 of the counter 401 becomes the low level, and the output signal Q1 of the counter 401 becomes the high level (the arrow a9).

Then because the output signal Q1 of the counter 401 becomes the high level, the output signal Q of the SR latch 406 become the high level (the arrow a10). As a result, the counter 402 is reset, the output signal Q0 of the counter 402 becomes the low level (the arrow a11), and the output signal of the XNOR gate 411 becomes the high level (the arrow a12).

Then because the output signal of the XNOR 411 becomes the high level, the counter 401 is reset (the arrow a13), and afterward the counter will not count even if the clock pulse F1 is given.

As described, even when the counters 401 and 402 become practicable to counting by pulling the crown to the second click and pushing it back to the original position, if the crown is not handled, the operation check function control circuit 310 returns to the state before handling the crown, and the signal SS does not change.

Compared to this, when the counters 401 and 402 become practicable to counting by pulling the crown to the second click, if a prescribed crown handling is done, the signal SS is raised by the operation check function control circuit 310.

From here, FIG. 6B is described. The operations with the arrow a1 to a7 are the same as in FIG. 6A.

As described in FIG. 6A, after the crown is pulled out to the second click, when two clock pulses F1 are generated, the state of the counter 402 becomes practicable to counting. Then when the crown is pushed back to the first click or the normal position, the state of the counter 401 becomes practicable to counting (the arrows a1 to a7).

Afterward, if the clock pulse F1 is generated, counting up at the counter 401 is carried out by this clock pulse F1, and the number of count of the counter 401 becomes "1" (the arrow a11). But before the next clock pulse F1 is generated, if the pulse SR2 is generated by the handling of the crown, the counter 401 is reset, and the number of count of the counter 401 becomes "0" (the arrow a12). And counting up at the counter 402 is carried out by the pulse SR2, and the number of count of the counter 402 becomes "2" (the arrow a13).

Then when the clock pulse F1 is generated, counting up at the counter 401 is carried out by this clock pulse F1, and the number of count of the counter 401 becomes "1" (the arrow a14). But before the next clock pulse F1 is generated, if the pulse SR2 is generated by the handling of the crown, the counter 401 is reset, and

the number of count of the counter 401 becomes "0" (the arrow a15). And counting up at the counter 402 is carried out by the pulse SR2, and the number of count of the counter 402 becomes "3" (the arrow a13). As a result, the signal SS becomes the high level (the arrow a17). By this, the operation mode of the electrical timepiece becomes the mode 1. And at the D flip-flap 405, the reset is cancelled.

When the number of count of the counter 402 becomes "3", the output signal of the XNOR gate 411 becomes the high level (the arrow a18). As a result, the counter 401 is reset. Therefore, afterward if the clock pulse F1 is generated, counting operation at the counter 401 will not be carried out.

As described above, if in the period from the rise to the fall of the signal SR1, two or more clock pulses F1 are generated, after the fall of the signal SR1, and before the generation of the clock pulse F1, the fall of the signal SR1 (the pulse SR2) takes place, and before the generation of the next clock pulse F1, the fall of the signal SR1 (the pulse SR2) takes place, the signal SS is switched to the high level. Here, because the cycle of the clock pulse F1 is one second, the time period from the rise of the signal SR1 to the fall of the signal SR1, or the time period T1 in FIG. 7, will be fully satisfied with two seconds.

The time period from the first fall to the second fall of the signal SR1, or the time period from the third fall to the fourth fall of the signal SR1, or the time period T2 in FIG. 7, will be satisfied with 1.5 seconds.

Next, the state when the operation check function mode select result signal SV2 has the low level, and the operation check function control signal SS has the high level will be described.

In this case, when the signal SR1 rises, the mode 1 is cancelled. This operation is described in FIG. 6B.

First, when the signal SR1 rises, the high level signal is input to the D flip-flop 405, and the output signal Q of the D flip-flop 405 becomes the high level (the arrow a21). As a result, the SR latch 406 is set (the arrow a22), and by this the counter 402 is reset, and the number of count of the counter 102 becomes "0" (the arrow a23). Then because the counter 402 is reset, the signal SS becomes the low level, and the mode 1 is cancelled (the arrow a24).

And because the signal SS becomes the low level, the D flip-flap 405 is reset (the arrow a25). The operation after this differs depending on what kind of wave form is formed by the signal SR1, but is described already above.



Next, reference to FIG. 4 and 7, the state when the operation check function mode is at the mode 2, and the operation check function mode select result signal SV2 becomes the high level will be described.

In this case, even if the signals SR1 and SR2 changes, the operation check function control signal SS does not turn to the low level.

Next, referring to FIG. 5 the detailed description will given with respect to the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

The second external input unit measure circuit 311 comprises an inverter 501, a double-input AND 502, and a 2-bit counter 503. The inverter 501 receives the operation check function control signal SS. The AND 502 receives the second external input signal ST and the operation check function mode select result signal SV3. Here, the second external input signal ST is a signal which becomes the high level when the switch (indicator switch) of the second external input unit G is pushed back. As for the 2-bit counter 503, in the reset terminal R enters an output signal of the inverter 501, and in the clock terminal enters an output signal of the AND 502. Therefore, when the signal SS has the high level and the signal SV3 has the high level, the 2-bit counter 503 counts the number of pulses (the number how many times the indicator switch is pushed back) input as the second external input signal ST. Here, the signal SV3 is a signal generated by decoding the output of the counter 503, becomes the low level when the number of count of the counter 503 is 2. Therefore, the counter 503 counts the value from 0 to 2.

In an explanatory example of FIG. 7, after the operation check function control signal SS becomes the high level at the time t1, the bits SU1 (Q0) and SU2 (Q1) of the counter 503 has been the low level. At the time t2, as the signal ST a pulse signal is input to the counter 503, the bit SU1 of the counter 503 becomes the high level and the bit SU2 of the counter 503 becomes the low level. At the time t3, as the signal ST another pulse signal is input to the counter 503, the bit SU1 of the counter 503 becomes the low level and the bit SU2 of the counter 503 becomes the high level. When the bit SU1 becomes the low level and the bit SU2 becomes the high level, the signal SV3 becomes low level. In this case, for example, even if as the signal ST a pulse signal is input to the counter 503, the output value of the counter 503 does not change. The counter 503 is reset when the signal SS becomes the low level (at the time t5).

The operation check function mode select circuit 312 in FIG. 5 comprise an AND 504 having three input of two negative-logic inputs and one positive-logic input, a NAND 506 having three input of one negative-logic inputs and two positive-logic input. In two negative-logic inputs of the AND 504 enter bits SU1 and SU2 of the counter 503, and in one positive-logic input of the AND 504 enters the operation check function control signal SS. As shown in FIG. 7, when both the bits SU1 and SU2 of the counter 503 has the low level and the operation check function control signal SS has the high level, the AND 504 outputs the operation check function mode select result signal SV1 with the high level indicating the operation check function is at the mode 1. In the same way, when the bit SU2 of the counter 503 has the low level and both the bit SU1 and the operation check function control signal SS has the high level, the AND 505 outputs the operation check function mode select result signal SV2 with the high level indicating the operation check function is at the mode 2. When the bit SU1 of the counter 503 has the low level and both the bit SU2 and the operation check function control signal SS has the high level, the NAND 506 outputs the operation check function mode select result signal SV3 with the high level indicating the operation check function is at the mode 3.

The stored electricity unit discharge control circuit 305 comprises an inverter 507, a D flip-flop 508, a double-input AND 509, and a triple-input AND 510.

In the inverter 507 enters a voltage detect result signal SN1. The signal SN1 is one of the bits of the voltage detect result signal SN. The signal SN1 becomes the high level, when the detection is made that the signal SC of indicating the stored voltage VKTN becomes lower than the discharge reference voltage DCHRGV (further from the ground VDD, that is, not reaching the predetermined discharge voltage). Incidentally, instead of the above configuration, it is also possible to make the signal SN1 the high level, when the detection is made that the stored voltage raising and lowering result signal SD which indicates the output voltage VSS of the raising and lowering circuit 49 becomes lower than the discharge reference voltage DCHRGV.

As for the D flip-flop 508, in the reset terminal R having the low active enters the operation check function mode select result signal SV1, in the clock terminal CLK enters the output signal of the inverter 507, and the data terminal D is fixed at the high level.

The AND 509 outputs a logical product of the output signals of the output terminal XQ of the D flip-flop 508 and the operation check function mode select result signal SV1 as the first stored electricity unit discharge control signals SO1.

The AND 510 comprises a negative-logic input and two positive-logic input. Into the negative-logic input enters the first stored electricity unit discharge control signals SO1 from the AND 509. Into the positive-logic inputs enters the operation check function mode select result signal SV1 and the discharge reference voltage DCHRGV. The AND 510 outputs a logical product of the input signals as the second stored electricity unit discharge control signals SO2.

As shown in FIG. 7, the stored electricity unit discharge control circuit 305 makes the first stored electricity unit discharge control signals SO1 the high level when operation check function mode shifts to the mode 1 under the condition when the battery unit (battery 48) is being charged.

In a period P1 when the first stored electricity unit discharge control signals SO1 has the high level, the timepiece control circuit 303 in FIG. 3 outputs as the motor driving signal SF a drive clock signal which short-circuits the motor drive circuit E or fast-forwards the motor unit D. Accordingly, in the period P1 in FIG. 7, the electrical charge in the battery unit 48 is released to be a drive current on a scale much larger than that at the normal drive state in the motor unit D.

As discharging continues, when the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result VSS becomes higher than the discharge reference voltage DCHRGV (that is, nearer to the ground VDD, meaning discharging advanced), the signal SN1 becomes the low level synchronous to the voltage detect control signal SX which repeatedly becomes the low level in a predetermined cycle. When the signal SN1 becomes the low level, the stored electricity unit discharge control circuit 305 makes the first stored electricity unit discharge control signals SO1 the low level. By this, the period P1 shifts to a period P2.

When the first stored electricity unit discharge control signals SO1 becomes the low level, the timepiece control circuit 303 in FIG. 3 outputs for example a signal to stop the motor drive unit E. Accordingly, in the period P2, discharging the battery unit 48 is stopped, and the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result VSS becomes to the low voltage gradually by voltage recovery effect. Then when the voltage VTKN or VSS becomes lower than the discharge reference voltage DCHRGV, the signal SN1 becomes the high level synchronous to the voltage detect control signal SX, and the second stored electricity unit discharge control signals SO2 becomes the low level. By this, the period P2 shifts to a period P3.

Incidentally, although not shown in FIG. 3, the operation check function control signal SS and the operation check function mode select result signal SV and the like are supplied to the timepiece control circuit 303. The timepiece control circuit 303 is capable of distinguishing the shifting state between each mode by these control signals.

When the second stored electricity unit discharge control signals SO2 becomes the high level, the timepiece control circuit 303 in FIG. 3 outputs as the motor driving signal SF a drive clock signal to fast-forward the motor unit D. Here, as fast-forwarding modes, there are a 32 hertz fast-forwarding, an intermittent drive of 32 hertz drive and stop, and 8 hertz fast-forwarding, and the like. In a period P3, the electrical charge of the battery unit 48 is re-released to be a drive current on a scale of smaller than that of the period P1 and larger than that at the normal drive state.

Then when the voltage VTKN or VSS becomes higher than the discharge reference voltage DCHRGV again, the signal SN1 becomes the low level at the timing synchronous to the voltage detect control signal SX, and the second stored electricity unit discharge control signals SO2 becomes the low level. By this, the period P3 shifts to a period P4.

When the second stored electricity unit discharge control signals SO2 has the low level, the timepiece control circuit 303 stops the motor drive circuit E. Therefore, in the period P4, discharging the battery unit 48 is stopped, and the stored electricity voltage VTKN of the battery unit 48 or the stored electricity voltage raising and lowering result VSS becomes to the low voltage gradually by voltage recovery effect again. Until the stored voltage becomes stable or the shift to the mode 2 is carried out by the external input, the states of the period P3 and P4 is repeated and the discharging is carried out. But FIG. 7 shows an example that after one repeat the shift to the mode 2 is conducted.

Next, the stored electricity unit charging completion judge circuit 306 shown in FIG.5 will be described. The circuit 306 is composed of an AND 511, and outputs as the stored electricity unit charge completion control signal SP a logical product of the voltage detect result signal SN2 and the operation check function mode select result signal SV2. Here, the signal SN2 is a signal output from the voltage detecting circuit 302 and becomes the high level when the stored electricity voltage VTKN or the stored voltage raising and lowering result signal SD (VSS) becomes lower than the charge reference voltage CHRGV (that is, further from the ground VDD, or reaching the predetermined discharge voltage). The signal SV2 is a signal output from the operation check function mode select circuit 312 and becomes the

high level when the mode is 2. Accordingly, the signal SP becomes the high level when the operation check function is at mode 2 and the stored electricity unit 48 is charged until the charge reference voltage CHRGV.

In the mode 2 in the timing chart of FIG. 7, a vibration is given to the timepiece from outside, and electricity is generated in the generator system A. Therefore the charging to the battery unit 48 is conducted, and the stored electricity voltage VTKN is going down (period P5). During this time, the timepiece control circuit 303 supplies for example a prefixed pulse signal to the motor drive circuit E, and controls the motor unit D to the normal hand movement (one-second interval movement).

Charging continues, and when the stored electricity voltage VTKN or the stored voltage raising and lowering result signal SD (VSS) becomes lower than the charge reference voltage CHRGV, the signal SN2 becomes the high level synchronous to the voltage detect control signal SX. And the stored electricity unit charge completion control signal SP becomes the high level. By this, the period P5 shifts to a period P6.

When the stored electricity unit charge completion control signal SP becomes the high level and the stage enters into the period P6, the timepiece control circuit 303 supplies for example the motor driving signal SG to the motor drive circuit E, and controls the hand movement state of the motor unit D to for example two-second interval movement which is different from the normal hand movement (in this case, one-second interval movement). By this change of the hand movement state, the notification of the completion of the charging is made. Incidentally, in the period P6, if the charging voltage increases (that is, discharging is conducted), charging is conducted in the same way as the period P5. Accordingly, in practical, the period P5 and P6 is repeated, and the charging voltage becomes stable.

Next, the motor drive trouble judge circuit 304 shown in FIG.5 will be described. The circuit 304 comprises double-input ANDs 512 and 513, both having a positive-logic input and a negative-logic input, a triple-input OR 514, a double-input OR515, and a 3-bit counter 516.

The AND 512 receives the non-rotation detect measure signal SY as a positive-logic input, and the high-frequency magnetic field detect result signal SK or the alternating current magnetic field detect result signal SL as a negative-logic input. Here, the signal SY is a signal generated when the non-rotation in the motor unit D is detected. The signal SK and SL becomes the high level when magnetic field is detected.

The AND 512 receives the rotation detect result signal SM as a positive-logic input, and an output bit Q2 of the counter 516 as a negative-logic input. Here, the signal SM becomes the high level when the non-rotation in the motor unit D is detected. The output bit Q2 of the counter 516 becomes the high level when the counter number of the counter 516 becomes 4 or more.

The OR 514 receives the output signal of the AND 512, the operation check function mode select result signal SV3, and the output bit Q2 of the counter 512.

The OR 515 receives the output signal of the AND 513 and the operation check function mode select result signal SV3.

The operation of the motor drive trouble judge circuit 304 configured as explained above will be described by reference to FIG. 7 as follows.

In FIG. 7, at the mode 2, when the indicator switch is pushed on, shift to the mode 3 is carried out (the period P6 to P7). In this mode 4, the operation check function mode select result signal SV3 becomes the active level (low level), and the reset of the counter 516 of the motor drive trouble judge circuit 304 is cancelled.

At the mode 3, the quality verification of the operation state under high and low temperature condition is carried out. The quality verification is carried out as follows.

First, the timepiece control circuit 303 in FIG. 3 supplies the motor drive signal SE to the motor drive circuit E, and conducts a normal control of the motor unit D (one-second interval movement, rotation detect, drive by auxiliary pulse under a certain condition, and the like).

Here, this supply of the motor drive signal SE rotates the motor. And when the rotation is detected, the rotation detect result signal SM is output from the rotation detect circuit 309, and thus the counter 516 is reset.

On the other hand, if the motor does not rotate with the supply of the signal SE, pulse signals including the auxiliary pulse having bigger effective electric power than the normal driving pulse are automatically supplied to the motor drive unit D from the timepiece control circuit 303, and at the same time the timepiece control circuit 303 outputs the non-rotation detect measure signal SY.

The counter 516 counts the number of generation of the signal SY.

When the non-rotation detect measure signal SY enters into the counter 516 four times successively under a condition of no detection of rotation, the output bit Q2 of the counter 516 becomes the high level, and the motor drive trouble judge signal SQ indicating that the motor has problem is output.

The timepiece control circuit 303, when the motor drive trouble judge signal SQ becomes the high level, supplies to the motor drive circuit E, for example, the motor drive signal SH for controlling the motor unit D to two-second interval hand movement which is different from the normal hand movement of one-second interval hand movement.

On the other hand, when the motor drive trouble judge signal SQ becomes the high level, the counter 516 no longer receives reset signal and clock signal. Therefore, the counter 516 stops counting. The signal SQ maintains the high level until the mode 3 is cancelled and the operation check function mode select result signal SV3 becomes the high level.

Namely, even after the quality verification operation under high and low temperature ends and the temperature becomes normal temperature, as long as the mode 3 is maintained, drive signals having different hand movement state from the normal hand movement is supplied to the motor unit D.

Accordingly, after the quality verification operation, notification of the motor drive trouble occurred during the quality verification operation continues to be made.

Next, the motor driving signal SF for discharging the battery unit will be described by reference to FIG. 8.

FIG. 8 is a block diagram showing the timepiece control circuit 303 shown in FIG. 1, the motor drive circuit E and the motor unit D. The motor drive circuit E comprises switches 701 to 705 and 707, and rotation detect use elements 706 and 708. In the example shown in FIG. 8, switches 701, 703, 705, and 707 are P-channel MOS (metal oxide semiconductor) transistors, and switches 702 and 704 are N-channel MOS transistors.

Four switches 701 to 704 form a bridge circuit which drives the stator winding of the motor unit D by use of a potential difference between VDD and VSS as source voltage.

Rotation detect use elements 706 and 708 are elements to place restrictions on current flowing through the motor unit D, and are comprised of resistors and the like.

Switch 705 and rotation detect use element 706 are connected in series between one terminal of the motor coil of the motor unit D and the power source line VDD. Switch 707 and rotation detect use element 708 are connected in series

between other terminal of the motor coil of the motor unit D and the power source line VDD

By the above configuration, in order to make short-circuit current flow in the motor drive circuit E for the purpose of discharging the battery unit 48, by turning the switches 701 and 704 on, it is possible to make the short-circuit current O1 flow in accord with load of the motor unit D. By turning the switches 701 and 704 on, it is also possible to make the short-circuit current O2 flow in accord with load of the motor unit D. And by making one of short-circuit currents O1 or O2 flow constantly, or by making short-circuit currents O1 and O2 flow by turns at a predetermined fast-forwarding cycle, it is possible to control the short-circuit current.

When required to generate a comparatively small discharge current, it is possible to make discharge current flow to the motor unit D via the rotation detect use elements 706 or 708.

Next, one example of the operation check method of the electronic timepiece explained above will be described by reference to FIG. 9A, 9B, 9C, and 10. FIG. 9A, 9B, and 9C cooperate to form a flowchart showing flow of operation check process of the electronic timepiece. The flowchart shows the check procedure of processes B101, B104, and B105, which comprise the operation check process B100 in the FIG. 2. FIG. 10 shows a specification of the operation check process in FIGs. 9A, 9B, and 9C.

Reference to FIGs. 9A, 9B, and 9C, when the timepiece is under normal operation drive state (step 801), crown operation for commanding to shift to the mode 1 in FIG. 10, that is to pull out the crown by two clicks and push it back for a predetermined time period, is done (step 802). As a result, the mode 1 (battery discharge mode) starts. Here, discharging by the drive by using for example a fast-forwarding pulse with 32 hertz (step 803). By this discharging, when the absolute value of the stored voltage VTKN declines below a prefixed voltage (in FIG. 10, 1.25V), the drive in the motor unit D stops (step 804). In practical, the fast-forwarding drive discharging in step 803 has two steps of the first being the continuous fast-forwarding discharging and the second being discharging by repeating fast-forwarding and stoppage by turn at a two second cycle. And when the voltage of the battery 48 returns, the steps 803 and 804 are carried out again and then repeatedly until the voltage will not return. It will take for example several tens of hour discharging until the state becomes stable at the state of the step 804. Incidentally, the time period necessary to discharge differs depending on the type of battery as shown in FIG. 10, but several tens of hours is adequate.



Therefore after discharging for a predetermined time period of several tens of hours, by checking the hand movement state, it is possible to judge whether or not the discharging is completed. In this example, as shown in FIG. 10, when repeatedly fast-forwarding and stoppage is occurring, it is possible to judge the discharging is completed, and when continuously fast-forwarding is occurring, it is possible to judge the discharging is not completed.

After completion of the discharge, when the operator handles the indicator switch once (step 805), the mode shifts to the mode 2 (charging mode). In the mode 2, the motor unit D is driven (step 806) in the normal hand movement method (one-second interval movement). During this period, by giving vibration, electricity is generated in the generator system A, and the battery 48 is charged (step 807). In here, charging for from several tens of minutes to several hours is carried out, and when the absolute value of the stored voltage VTKN becomes equal to or larger than the predetermined voltage (in FIG. 10, 1.33 V), the normal hand movement state shifts to the two-second interval movement state (step 808). Therefore, after the predetermined time period, if the normal hand movement state is maintained, it is possible to judge the charging function has problem (step 809). In here, before the operation check of the mode 3, time adjusting is carried out (step 810). Time adjusting is done by for example pulling out the crown by two clicks and turning the crown. In the present embodiment, when the mode is at the mode 1 or 3, if the crown is operated, the operation check function is released. But, when the mode is at the mode 2, if the crown is operated for adjusting time, the mode does not shift to other mode.

Next, when the operator handles the indicator switch once (step 811), the mode shifts to the mode 3 (operation mode). In the mode 3, the motor unit D is driven (step 812) in the normal hand movement. Then in the electronic timepiece, self-verification of the drive malfunction during operation is carried out by use of the auxiliary pulse (step 813). In here, when the successive pulse drive by using more than a predetermined auxiliary pulses is not carried out during operation, the electronic timepiece judges itself as normal and leaves the hand movement state in the one-second interval movement (step 814). By this, the operator can judge that the electronic timepiece is in good quality. On the other hand, when the successive pulse drive by using more than a predetermined auxiliary pulses is carried out during operation, the electronic timepiece judges itself as bad and makes the hand movement state in the two-second interval movement (step 815). By this, the operator can judge that the electronic timepiece is in bad quality.

Next, when the operator performs a two-click crown pull-out (step 816), the mode 3 is cancelled, and the normal operation state is recovered (step 817).

Incidentally, at the step 814, when the indicator handling is carried out twice (step 818), the movement becomes the one-second interval movement (step 819). In this case, even if the charging is carried out next (step 820), the one-second hand movement continues (step 821) irrespective of the charging state. And at the step 804, when the indicator handling is carried out three times or more (step 822), the indicator for indicating the charging state is put into operation (step 823). And also at the step 810, it is conceivable that indicator handling is carried out twice or more (step 824), or the operation state becomes that of the step 821 or 823. In these cases, when the crown is handled once next time (step 825), the operation returns to the normal drive state of the step 801. By these check procedure, even if the operator makes a mistake in inputting operation with the indicator, it is impossible to happen mis-judgement of the poor quality product as good quality one. For example, at the step 804, the normal check flow is first an indicator handling then shifting to the mode 2. However, it can happen that the operator performs indicator handling twice by mistake. In this case, one-second interval movement takes place. And the operator cannot tell that the movement is of the step 806 or 819. But since the operator thinks that the indicator handling is performed once, the operator thinks the mode is at the mode 2 and conducts charging. In this case, charging at the step 820 follows and then one-second interval movement at the step 821 follows. And the operator thinks the step 821 as the step 809, and judges the electronic timepiece to be in poor condition (in reality, since at the mode 1 the indicator is handled twice, the mode is shifted to the mode 3 not 2). As described here, there are cases that the check flow shifts to the step 825 due to mis-judgement of the good quality product as poor quality one. But it is impossible to mis-judge the poor quality product as good quality one. And the mis-judged timepiece as poor quality is undoubtedly judged as good when the check is redone from the step 825. And at the step 804, when the indicator handling is performed three times or more, that is as the above case when the operator performs indicator handling three times or more by mistake, the third indicator handling is for example an operation for starting displaying the charging amount indicator. In this check flow, since there is no process to start displaying the charging amount indicator, the operator can tell immediately that the mode is not at the mode 2 due to difference of the display. Therefore, the operator thinks that the indicator handling is wrongly done, and proceeds to the step 825, then reconducts checking. On the other hand, at the step 810, if the indicator handling is performed twice or more, the second indicator handling is an operation for starting displaying the charging amount indicator. In

this check flow, since there is no process to start displaying the charging amount indicator, the operator can tell immediately that the mode is not at the mode 3 due to difference of the display. Therefore, the operator thinks that the indicator handling is wrongly done, and proceeds to the step 825, then re-conducts checking.

As described above, with the present embodiment, at the mode 1, by performing an external input operation to the electronic timepiece, discharging is carried out by fast-forwarding drive in the motor unit D, or by short-circuiting of the motor drive circuit E, or the like. Accordingly, no special provision for discharging the battery is necessary. And when the mode becomes the mode 1, the shift takes place from the normal hand movement state to the different state of fast-forwarding hand movement or hand movement stoppage. By looking the difference of the hand movement, the mode shift is easily verified.

In the above embodiment, the external input operation is performed by use of the crown and the indicator switch. But the present invention is not limited to this. It is possible to use other mechanical input method. And it is also possible to furnish an infrared remote control receiver unit in the electronic timepiece, and use infrared signal as input method. Electricity, a radio wave, light, sound, an electromagnetic wave, heat, and the like are also applicable as input method.

In the above embodiment, discharging at the mode 1 is continued until the battery voltage reaches the prescribed voltage. And when the battery voltage reaches the prescribed voltage, the discharging and the hand movement stop. Accordingly, by the hand movement (fast-forwarding or stoppage), judging is possible whether discharging continues or discharging is completed. And by the battery voltage recovery effect when the battery voltage exceeds the predetermined voltage, discharging is resumed and is repeatedly carried out until the voltage becomes the predetermined voltage. Accordingly, the battery voltage after discharging becomes stable.

Also, in the above embodiment, two setting values of the discharging current amount are provided. At the first stage is heavy load discharging, at the second stage is light load discharging. Therefore it is possible to control the battery voltage to the predetermined voltage in less time period. More than two setting values of the discharging current amount can be provided.

And, at the mode 2, shifting to charging mode by operation of external input on the electronic timepiece is possible, and after the mode shifting the operation is done in the normal hand operation state. When charging voltage reaches the completion voltage, by changing the hand movement state the notification is made

that the charging is done to the predetermined voltage or more. The changing of the hand movement at this time is not limited to the above form, and can be arranged in any other form as long as it is possible to tell the difference of before and after charging completion.

At the mode 2, during charging the battery, there is a false voltage increase. Therefore, even though the voltage once reaches the completion voltage, the battery voltage can decline to the real voltage gradually after completion of the charging. But, in the present embodiment, in the case where the charging voltage once reaches the charging completion voltage if the voltage falls below the charging completion voltage, again the hand movement returns to the normal hand movement. Accordingly, after completion of the charging, by leaving the timepiece until the battery voltage becomes the real voltage and then confirming the hand movement, it is possible to prevent a mis-judgement due to a false voltage increase.

In the above embodiment, if detection is made successively that the motor does not rotate when the normal motor drive pulse is supplied, a drive pulse having bigger effective electric power than the normal driving pulse is supplied. And at the mode 3, if the drive pulse is output successively predetermined times or more, the judgement is made that the motor trouble of not driven by the normal drive pulse occurred. Thus the hand movement is changed, and the notification of the motor trouble is made.

At the mode 3, by operation of external input on the electronic timepiece, the mode is shifted to a poor quality detection mode, and the electronic timepiece is operated in a predetermined hand movement. Therefore, by changing the hand movement state of before and after this shift, it is made possible to easily confirm the mode shift.

And, once the trouble is detected, the hand movement at the trouble detection is continued, therefore it is possible to easily confirm the result of trouble detection.

And at the mode 3, because it is possible to perceive the motor drive trouble by the hand movement, it is made possible to identify the trouble.

Also, it becomes possible to detect that the motor quality is somewhat lower than the satisfying quality but is not bad enough to cause stoppage (time keeping continuation trouble) or delay, both being difficult to detect hitherto. Therefore, quality improvement is expected. Namely, if the motor quality is a bit poor and the detection of the non-rotation is frequently made, the motor will be driven by the auxiliary pulse having bigger effective electric power than the normal driving pulse. Therefore, time delay does not happen. But because of the frequent output of the

auxiliary pulse, power consumption rises and remaining operation time shortens. This kind of quality cannot be properly discovered until now due to no time delay, but the mode 3 makes the detection certain.

In the above embodiment, no special check equipment is necessary to conduct the operation check function. Therefore the present invention is easily applicable to the cases of for example advancing to foreign market, or assembling at several regions or places. And even after the shipment for example at the store or at the sales department or the like, it is possible to verify the timepiece operation easily.

Method corresponding to the mode 1 to 3 mentioned above can be solely used, for example following utilizations are possible.

- a. Manufacturing and using battery voltage adjusting devices corresponding to the mode 1.
- b. Manufacturing and using check devices or full-charge notification devices corresponding to the mode 2.
- c. Manufacturing check devices corresponding to both of the mode 1 and 2, and using them for checking of generation unit of analog, digital, or analog-digital combination electrical timepieces.
- d. Configuring operation check system corresponding to all of the mode 1, 2, and 3, and using them for operation checking of analog, digital, or analog-digital combination electrical timepieces.
- e. Combining the mode 1 and 3, and using for various devices.
- f. Combining the mode 2 and 3, and using for various devices.

Also, in the above embodiment, the operation result of each mode (states of discharging or charging or operation check result) is revealed by changing the displaying state (hand movement state) on the time displaying section. But this is not limited to the above form, and other method can be used to reveal the operation result of each mode. For example, if the timepiece has a digital displaying section, it is possible to change the displaying state from the non-displaying state to other state, and thus to enable the notification of the operation result. And if the timepiece has a sound wave generating element or display light, by shifting of sound generation and sound non-generation, by turning the light on/off, by shifting of the sound generation state (frequency, generation cycle, or the like), or by changing the flashing period of the display light, it is possible to notify the charging state or the check result.

The embodiment of the present invention is not limited to the above embodiment. For example, the charging device for the battery is not limited to the provision as an internal unit, but can be provided as a removable unit or as an external unit.

In the above embodiment, a timepiece is exemplified with a generator of an oscillating weight or the like is driven by kinetic energy and the electricity is generated by the rotation from the oscillation weight and then by the electricity the timepiece works. But the present invention is not limited to this. Other generation method is also possible for an electrical timepiece such as seizing light energy with solar panel, such as seizing thermal energy with Peltier element, and such as seizing strain energy with piezo element. Other method is also possible for an electrical timepiece by providing electricity generated by an electromagnetic induction from outside of the timepiece, and then a stepping motor is moved by the electricity. In addition to timepieces, the present invention is applicable to stopwatches and other time keeping apparatus. And the raising and lowering circuit 49 can be omitted. In that case, the circuit driven by the output voltage VSS of the circuit 49 is driven by the output voltage VTKN of the battery 48.

## WHAT IS CLAIMED IS:

## 1. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time;

a battery capable of charging;

a drive unit for driving the displaying section using with electrical power stored in the battery;

a comparator unit for comparing voltage stored in the battery with a reference voltage,

a discharge control unit for starting discharge of the battery when an external input signal ordering start of discharge start is input with the external input unit, and for stopping the discharge when comparison result by the comparator unit satisfies a discharge stop condition.

## 2. An electronic timepiece according to claim 1,

wherein the discharge control unit resumes discharge from the battery when the comparison result by the comparator unit becomes unsatisfying to the discharge stop condition.

## 3. An electronic timepiece according to claim 2,

wherein the discharge control unit, when a predetermined external signal is received by the external input unit, starts discharge from the battery in a first discharge method, and when the comparison result by the comparator unit satisfies the discharge stop condition, stops discharge from the battery, and starts discharge from the battery in a second discharge method in which discharge rate is lower than that of the first discharge method.

4. An electronic timepiece according to claim 1, further comprising a discharge unit which forms a closed circuit with the battery, and conducts a discharge current which flows through the closed circuit and lowers voltage stored on the battery.

5. An electronic timepiece according to claim 1,

wherein the discharge control unit executes the discharge from the battery by controlling the drive unit to drive the display section.

6. An electronic timepiece according to claim 1,

wherein the displaying section comprises an electric motor and a rolling system driven by the electric motor to change display of the displaying section, and,

the discharge control unit executes the discharge from the battery by controlling the drive unit to fast-forward the rolling system of the displaying section.

7. An electronic timepiece according to claim 1, further comprising a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a second displaying state which is different from the first displaying state when comparison result by the comparator unit becomes satisfying to a predetermined condition.

8. An electronic timepiece according to claim 1,

wherein the displaying section comprises an electric motor and a rolling system driven by the electric motor and changing display of the displaying section, and

the electronic timepiece further comprises:

a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to



drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition,

a trouble detecting unit for detecting a drive trouble of the electric motor, and,

a drive trouble judge unit for controlling the drive unit to drive the displaying section into a third displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a fourth displaying state which is different from the third displaying state when a drive trouble is detected by the trouble detecting unit.

#### 9. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time;

a battery capable of charging;

a drive unit for driving the displaying section by use of electrical power stored in the battery;

a comparator unit for comparing voltage stored on the battery or a voltage corresponding to the voltage with a reference voltage; and

a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition;

#### 10. An electronic timepiece according to claim 9,

wherein the charging state judge unit for controlling the drive unit to drive the displaying section into the first displaying state when the comparison result by

the comparator unit becomes satisfying to a predetermined condition and then becomes unsatisfying to the predetermined condition.

11. A check method for an electronic timepiece comprising:

an external input unit for inputting an external input;

a displaying section for displaying time;

a battery capable of charging;

a drive unit for driving the displaying section by use of electrical power stored in the battery;

a comparator unit for comparing a voltage stored on the battery or a voltage corresponding to the voltage with a reference voltage;

a discharge control unit for starting discharge of the battery when a first external input ordering a discharge start is received by the external input unit, and for stopping the discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition; and

a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a second external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition,

the method comprising:

a first step of controlling the voltage stored on the battery by giving the first external input signal from the external input unit and thereby starting the operation of the discharge control unit;

a second step of judging the voltage stored on the battery or a voltage corresponding to the voltage from the displaying state of the displaying section by giving the second external input signal to the external input unit and thereby starting the operation of the charging state judge unit.

12. A check method according to claim 11,

wherein the external input unit comprises a first and a second switch for adjusting time on the displaying section,

in the first step the first external input signal is generated by operation to the first switch,

in the second step the second external input signal is generated by operation to the second switch, and,

during or after the second step time is adjusted with the first switch.

13. A check method for an electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time, the displaying section including an electric motor and a rolling system driven by the electric motor and changing display of the displaying section;

a battery capable of charging;

a drive unit for driving the motor of the displaying section using with electrical power stored in the battery;

a comparator unit for comparing voltage stored in the battery with a reference voltage;

a discharge control unit for starting discharge of the battery when an external input signal ordering start of discharge start is input with the external input unit, and for stopping the discharge when comparison result by the comparator unit satisfies a discharge stop condition;

a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition;

a trouble detecting unit for detecting a drive trouble of the electric motor;  
and

a drive trouble judge unit for controlling the drive unit to drive the displaying section into a third displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a fourth displaying state which is different from the third displaying state when a drive trouble is detected by the trouble detecting unit,

the method comprising the steps of:

a first step of starting the operation of the discharge control unit, and controlling the voltage of the stored electricity of the battery by using an input of a first prescribed external signal as a start condition;

a second step of starting the operation of the charging state judge unit, and controlling the displaying state of the displaying section in accordance with the voltage of the stored electricity of the battery by using an input of a second prescribed external signal as a start condition; and

a third step of starting the operation of the drive trouble judge unit, and controlling the displaying state of the displaying section based on the detection result of the drive trouble of the electric motor by using an input of a third prescribed external signal as a start condition.

#### 14. A check method for the electronic timepiece according to claim 13,

wherein the external input unit comprises a first and a second switch for adjusting time on the displaying section,

the first external input signal is generated by operation to the first switch,

the second external input signal is generated by operation to the second switch, and,

during or after the second step time is adjusted by the first switch.

#### 15. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user;

a battery capable of charging;

a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition.

#### 16. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user;

a battery capable of charging;

a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition; and

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition.

17. An electronic timepiece according to claim 16,

wherein the charge state judge unit controls a notification state of the notification unit to the first state when the comparison result by the comparator unit becomes satisfying to a predetermined condition, and then becomes unsatisfying to a predetermined condition.

18. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user comprising a displaying section with a rolling system by an electric motor;

a battery capable of charging;

a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition;

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition;

a trouble detecting unit for detecting a drive trouble of the electric motor;

and

a drive trouble judge unit for controlling a notification state of the notification unit into a third state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a fourth state which is different from the third state when a drive trouble is detected by the trouble detecting unit.

## 19. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time comprising a rolling system by an electric motor;

a notification unit for notifying a user;

a battery capable of charging;

a trouble detecting unit for detecting a drive trouble of the electric motor;  
and

a drive trouble judge unit for controlling a notification state of the notification unit into a first state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a second state which is different from the first state when a drive trouble is detected by the trouble detecting unit.

## 20. An electronic timepiece comprising:

an external input unit for inputting an external input signal;

a displaying section for displaying time comprising a rolling system by an electric motor;

a battery capable of charging;

a drive unit for driving the displaying section by use of electrical power stored in the battery;

a trouble detecting unit for detecting a drive trouble of the electric motor;  
and

a drive trouble judge unit for controlling a notification state of the notification unit into a first state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a second state which is different from the first state when a drive trouble is detected by the trouble detecting unit.

21. A check method for an electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user;

a battery capable of charging;

a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition; and

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition,

the method comprising the steps of:

a first step of starting the operation of the discharge control unit, and controlling the voltage of the stored electricity of the battery by using an input of a first prescribed external signal as a start condition; and

a second step of starting the operation of the charging state judge unit, and controlling the notification state of the notification unit in accordance with the voltage of the stored electricity of the battery by using an input of a second prescribed external signal as a start condition.

22. A check method for an electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user comprising a displaying section with a rolling system by an electric motor;



a battery capable of charging;

a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition;

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition;

a trouble detecting unit for detecting a drive trouble of the electric motor;  
and

a drive trouble judge unit for controlling a notification state of the notification unit into a third state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a fourth state which is different from the third state when a drive trouble is detected by the trouble detecting unit,

the method comprising the steps of:

a first step of starting the operation of the discharge control unit, and controlling the voltage of the stored electricity of the battery by using an input of a first prescribed external signal as a start condition,

a second step of starting the operation of the charging state judge unit, and controlling the notification state of the notification unit in accordance with the voltage of the stored electricity of the battery by using an input of a second prescribed external signal as a start condition, and,

a third step of starting the operation of the drive trouble judge unit, and controlling the notification state of the notification unit based on the detection result of the drive trouble of the electric motor by using an input of a third prescribed external signal as a start condition.

### 23. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user of prescribed information including time comprising a displaying section with a rolling system by an electric motor;

a battery capable of charging;

a drive unit for driving the notification unit by use of electrical power stored in the battery;

a comparator unit for comparing voltage of the stored electricity in the battery with a reference voltage;

a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition;

a trouble detecting unit for detecting a drive trouble of the electric motor; and

a drive trouble judge unit for controlling a notification state of the notification unit into a first state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a second state which is different from the first state when a drive trouble is detected by the trouble detecting unit.

### 24. An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for notifying a user of prescribed information including time comprising a displaying section with a rolling system by an electric motor;

a battery capable of charging;

a drive unit for driving the notification unit by use of electrical power stored in the battery;

a comparator unit for comparing voltage of the stored electricity in the battery with a reference voltage;

a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition;

a trouble detecting unit for detecting a drive trouble of the electric motor; and

a drive trouble judge unit for controlling a notification state of the notification unit into a third state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a fourth state which is different from the third state when a drive trouble is detected by the trouble detecting unit.

# ABSTRACT

An electrical timepiece comprises external input units for receiving an external input signal, a motor unit for driving an analog hand unit for displaying time, a battery unit capable of charging, a voltage detect circuit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage, and a stored electricity unit discharge control circuit for starting discharge from the battery when an external input signal is received by one of the external input unit, and for stopping discharge from the battery when the comparison result by the voltage detect circuit satisfies a prescribed condition.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2

FIG. 1

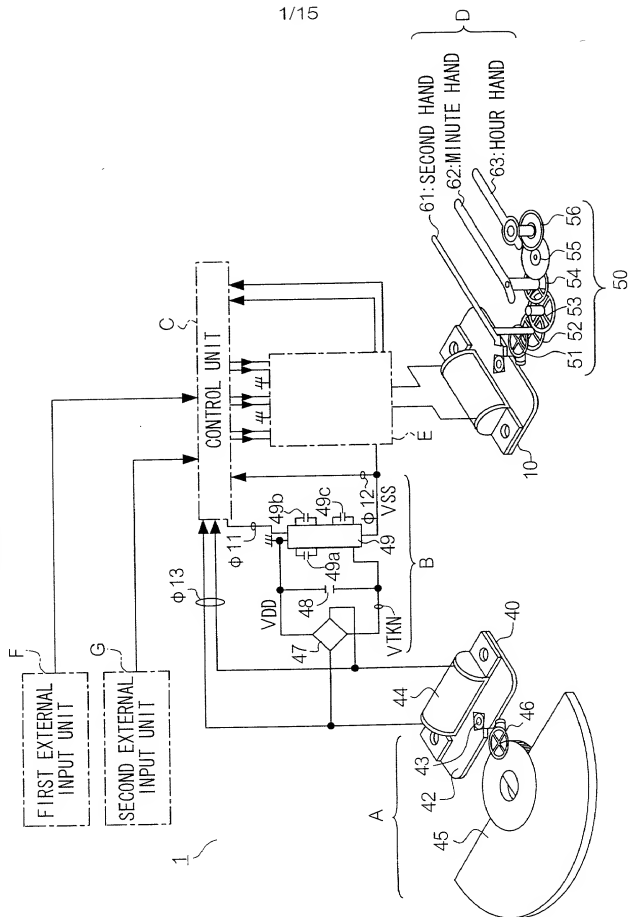


FIG. 2

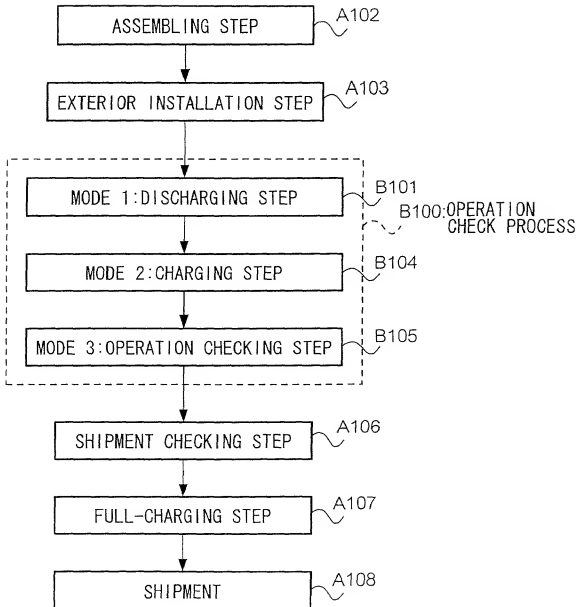


FIG. 3

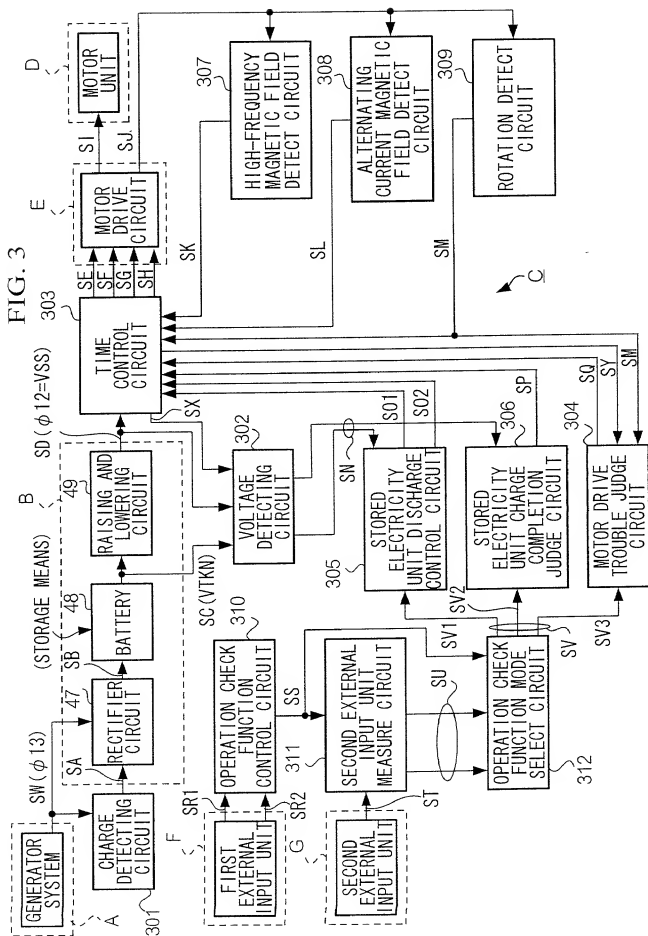


FIG. 4

401: OPERATION CHECK FUNCTION CONTROL CIRCUIT

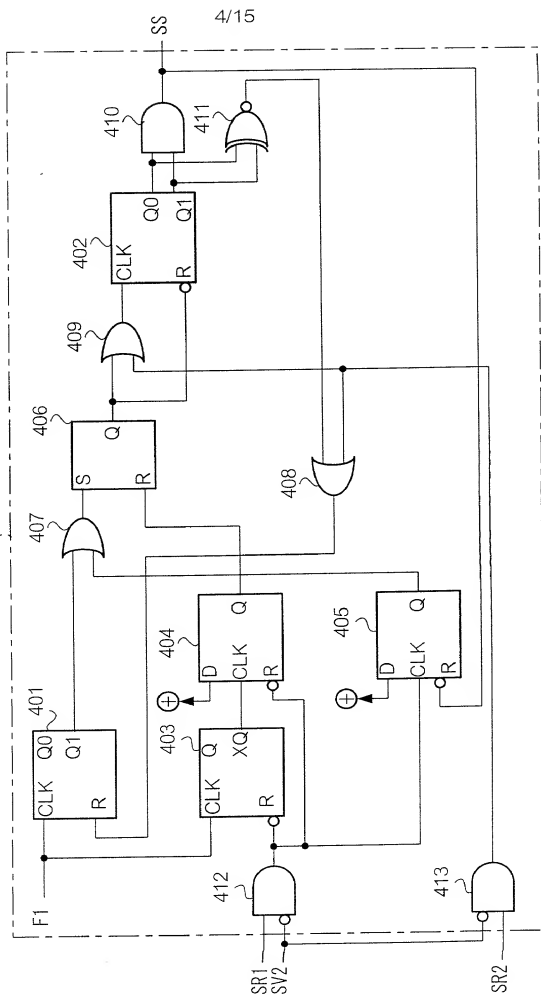




FIG. 5

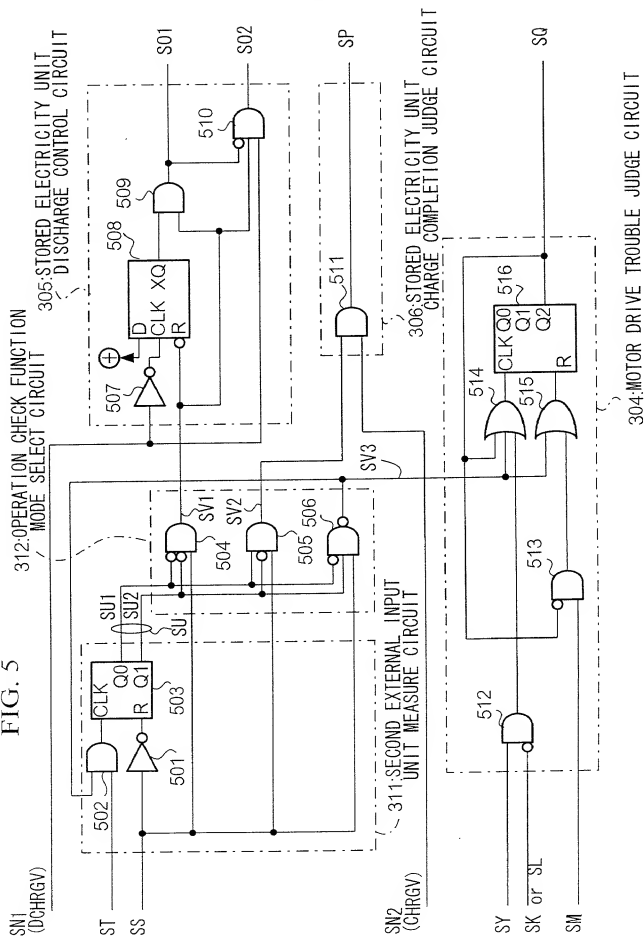


FIG. 6A

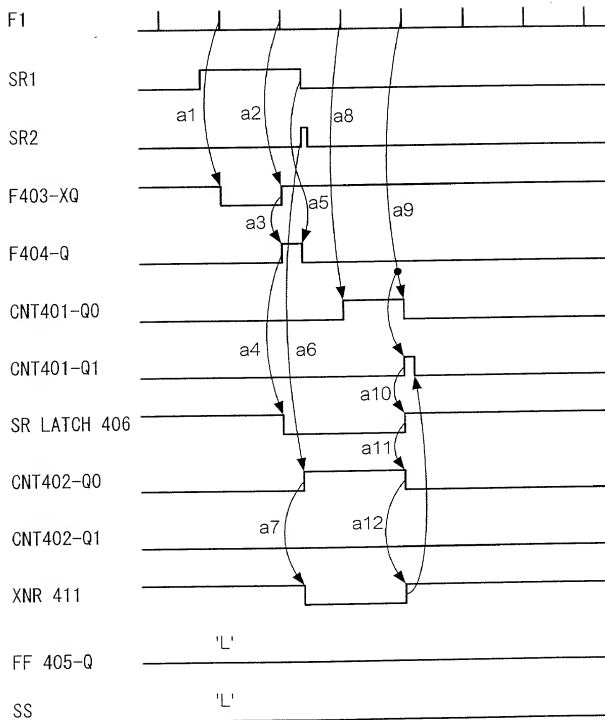


FIG. 6B

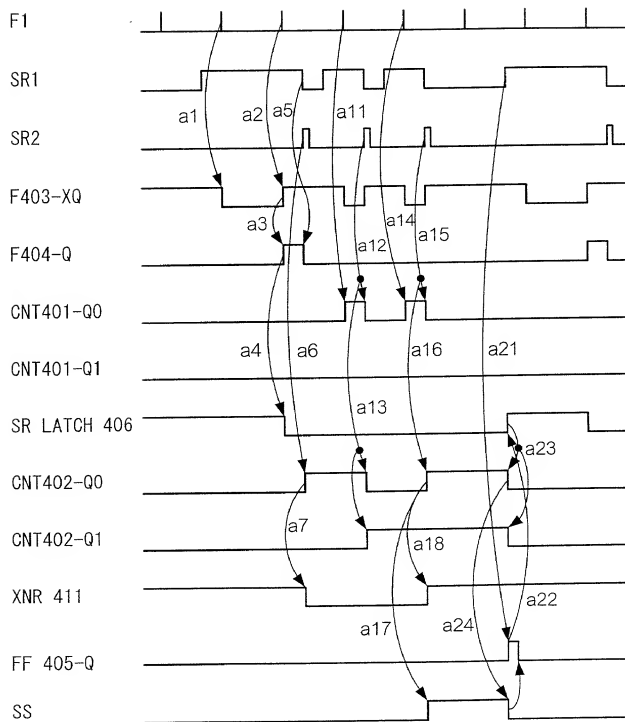


FIG. 7

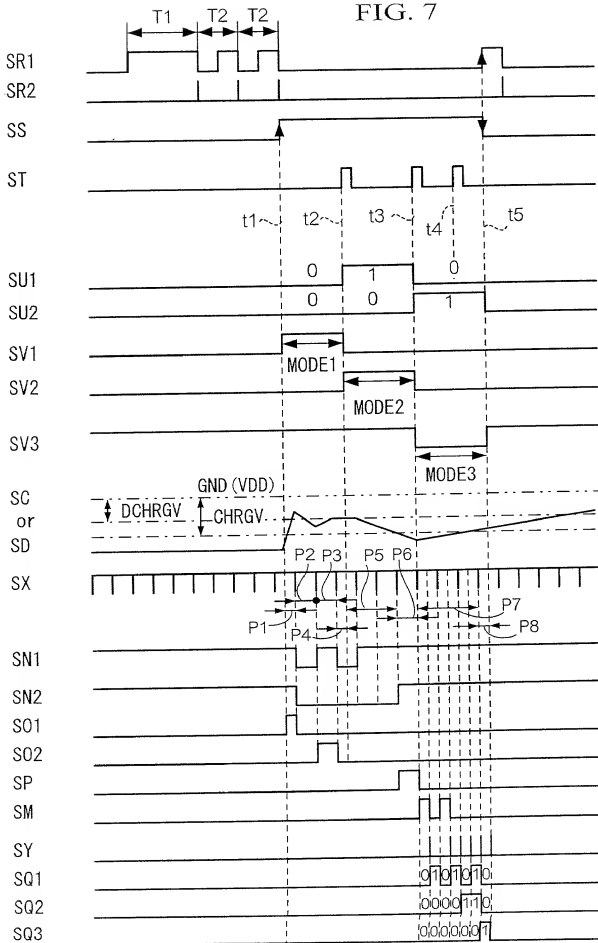


FIG. 8

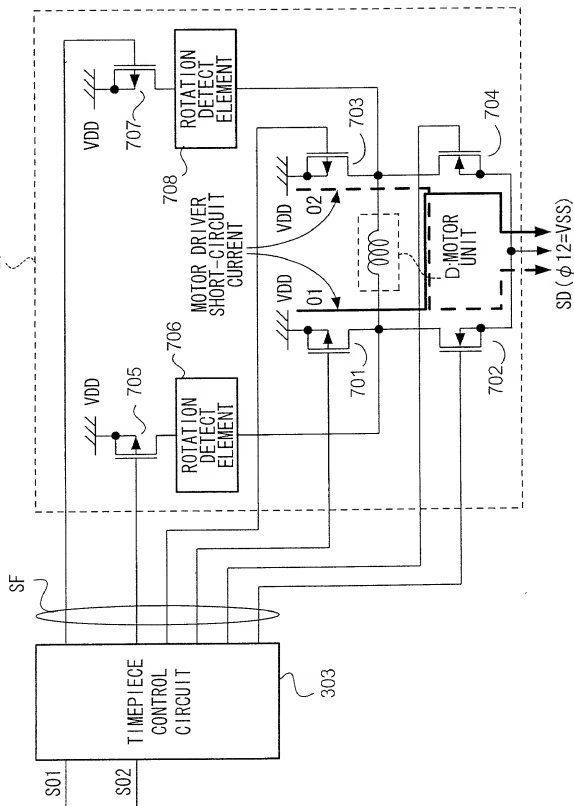
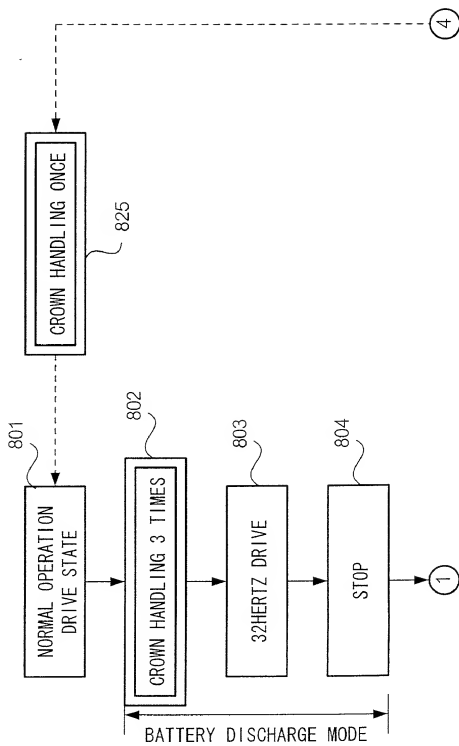


FIG. 9A



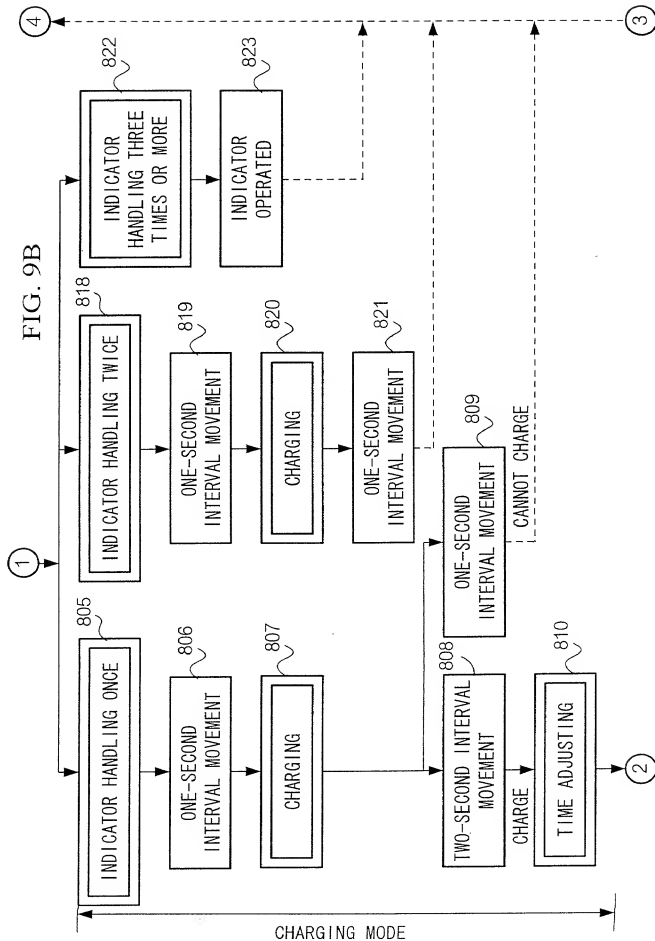


FIG. 9C

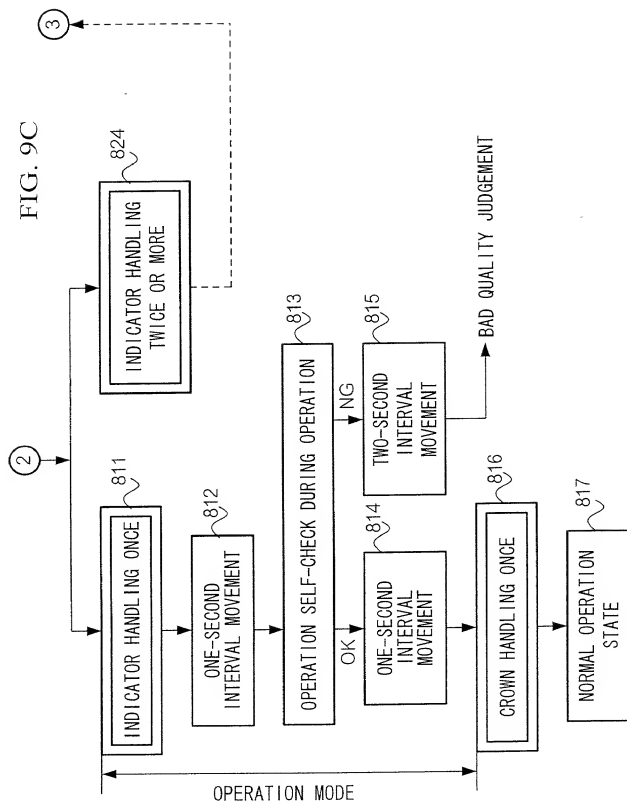




FIG. 10


MODE	MODE 1	MODE 2	MODE 3	NORMAL
CROWN HANDLING (TWO-CLICK PULL)	 <p> <math>1 \sim 2</math> SECOND <math>\leq</math>            FAST-FORWARDING PULSE            DISCHARGE  <math>1.5</math> SECOND <math>\geq</math> </p>			ONCE
INDICATOR HANDLING		ONCE	ONCE	
FUNCTION	FAST-FORWARDING PULSE DISCHARGE	CHARGING COMPLETION NOTIFICATION	OPERATION CHECK	
HAND MOVEMENT STATE	CONTINUOUS FAST-FORWARDING	NORMAL HAND MOVEMENT	NORMAL HAND MOVEMENT	NORMAL HAND MOVEMENT
VTKN				
1.33V				
1.25V				
CONTINUOUS TIME	5~15HOURS	80MINUTES~3HOURS	20HOURS	
JUDGE-MENT	GOOD	REpetition OF FAST-FORWARDING AND STOP	NORMAL HAND MOVEMENT	
BAD	CONTINUOUS FAST-FORWARDING		TWO-SECOND INTERVAL MOVEMENT	

FIG. 11

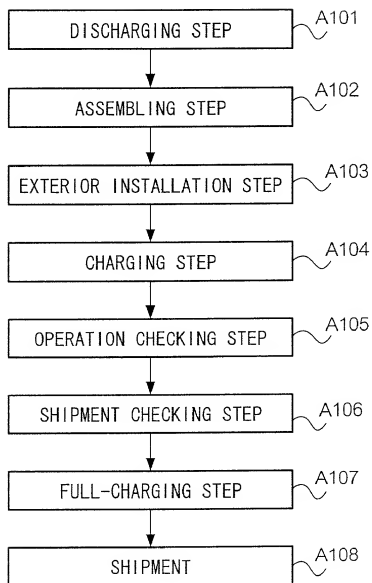


FIG. 12

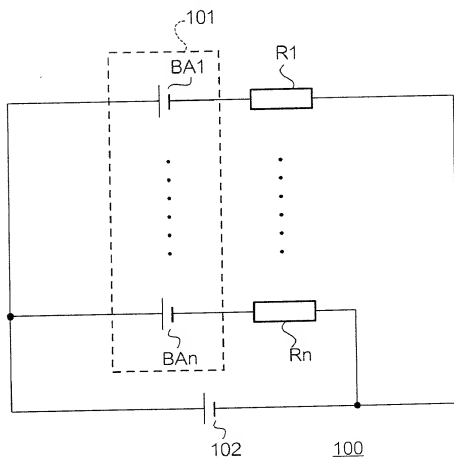


FIG. 13

